

<u>Type</u>	Electronic transformer for high-voltage luminous discharge tubes according to EN 50107. Suitable for indoor systems. Limited suitability for flash operation.
<u>Weight</u>	0.750 kg
<u>Radio interference suppression</u>	According to VDE 0875, Part 2A1 (EN 55015)
<u>Temperatures</u>	Ambient temperature: max +65 °C Temperature limit: +80 °C (max. ambient temp. that the EVG is able to withstand for a short period of time without being destroyed)
<u>Housing</u>	Polystyrene shell Fire protection class B1 Standard colour: white Sealing compound: polyurethane (black)
<u>Class of protection</u>	I
<u>Degree of protection</u>	IP 67



Primary Data	
<u>Mains voltage</u>	230 V, +/- 10 %, 50 / 60 Hz
<u>Current consumption</u>	Depends on the connected tube load; max. 0.55 Amp cos phi 0.95

Protective Equipment	
<u>Safety fuse</u>	Integrated 1 Amp. melting fuse offering protection against internal short circuits.
<u>Earth leakage trip</u>	(acc. to EN 50107) integrated in the transformer
<u>Open circuit protection</u>	(acc. to EN 50107) integrated in the transformer

Caution:
The installation instructions must be observed when using the transformers!

Secondary Data

5,000 V with 20 mA constant current, symmetrical alternating current, operating frequency approx. 22 kHz, centrally earthed secondary winding.

The turn-on/turn-off time is adjustable between approx. 0.4 s and 5 s.

Internal high-voltage shutdown under fault conditions (in case of e.g. tube breakage or earth fault).

Suitable for blue and red discharge tubes (no 'jelly beaning').


Connectable tube lengths (in metres):

Blue discharge (Indoor)						
Diameter	8	10	12	15	18	20
2 Syst.	5.6	7.2	9.0	10.9	12.8	13.8
3 Syst.	5.3	6.8	8.5	10.3	12.1	13.0
4 Syst.	5.0	6.4	8.0	9.7	11.4	12.3
5 Syst.	4.6	6.0	7.5	9.1	10.7	11.5
6 Syst.	4.3	5.6	7.0	8.5	10.0	10.8
7 Syst.	4.0	5.2	6.5	7.9	9.2	10.0
8 Syst.	3.7	4.8	6.0	7.3	8.5	9.2
9 Syst.	3.4	4.4	5.5	6.7	7.8	8.4

Red discharge						
Diameter	8	10	12	15	18	20
2 Syst.	3.1	3.8	4.7	5.8	7.0	7.5
3 Syst.	2.9	3.5	4.4	5.4	6.5	7.0
4 Syst.	2.7	3.3	4.0	5.0	6.0	6.5
5 Syst.	2.5	3.0	3.7	4.6	5.6	6.0
6 Syst.	2.2	2.8	3.4	4.2	5.1	5.5
7 Syst.	2.0	2.5	3.1	3.8	4.6	5.0
8 Syst.	1.8	2.2	2.7	3.4	4.1	4.4
9 Syst.	1.6	2.0	2.4	3.0	3.6	3.9


The values given represent the maximum connectable tube lengths which must not be exceeded. Shorter tube lengths, however, may be connected without any restrictions. The tube lengths are calculated on the basis of the 'Filling Pressure Recommendations for Fluorescent Tubes' published by the German *Fachverband Lichtwerbung*.

Housing dimensions



205x39x37 mm

Housing colour: white
All dimensions in millimetres

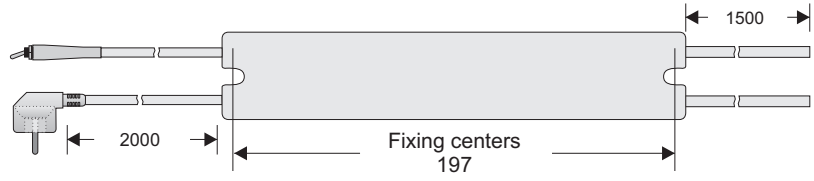

2000 197 1500

Fixing centers

Order no. 1 2050 204

High voltage cable: (N)YL, transparent 7.0 mm (diameter)

Mains cable: H03VV-F, 3x0.75
CEE right-angle earthing pin plug

Technical modifications reserved. Jan. 2012 Content is protected by copyright. Source: www.hansen-led.com D12050204/01/2012