

<u>Type</u>	Electronic transformer for high-voltage luminous discharge tubes according to EN 50107. Suitable for indoor and outdoor systems. Limited suitability for flash operation.	CE
<u>Weight</u>	0.280 kg	
<u>Radio interference suppression</u>	According to VDE 0875, Part 2A1 (EN 55015)	
<u>Temperatures</u>	Ambient temperature range: -25 to +65°C Temperature limit: +80°C (max. ambient temp. that the EVG is able to withstand for a short period of time without being destroyed)	
<u>Housing</u>	Hard PVC shell Standard colour: white Sealing compound: polyurethane (black)	
<u>Class of protection</u>	I	
<u>Degree of protection</u>	IP 67	

Primary Data	
<u>Mains voltage</u>	230 V, +/- 10 %, 50 / 60 Hz
<u>Current consumption</u>	Depends on the connected tube load; max. 0.25 A cos phi 0.95

Protective Equipment	
<u>Safety fuse</u>	Integrated 1 A melting fuse offering protection against internal short circuits
<u>Earth leakage trip</u>	(acc. to EN 50107) integrated in the transformer
<u>Open circuit protection</u>	(acc. to EN 50107) integrated in the transformer

Caution:
The installation instructions must be observed when using the transformer!

Secondary Data

2,000 V with 20 mA constant current, symmetrical alternating current, load-dependent operating frequency, 16 - 20 kHz, earthed secondary winding.

Internal high-voltage shutdown under fault conditions (e.g. in case of tube breakage).

20/2:

Suitable for blue discharge tubes. Only partly suitable for red discharge tubes due to an occasional jelly bean effect.

20/2R (red discharge):

No jelly beaming, suitable for red discharge tubes only.

Connectable tube lengths (in metres):


Blue discharge (outdoor)						
Diameter	10	12	15	18	20	22
1 Syst.	2.3	2.8	3.5	4.1	4.4	4.8
2 Syst.	1.9	2.3	2.9	3.4	3.6	4.0
3 Syst.	1.5	1.8	2.2	2.6	2.8	3.1
4 Syst.	1.0	1.3	1.6	1.9	2.1	2.2
5 Syst.	0.6	0.8	1.0	1.2	1.3	1.4

Blue discharge (indoor)						
Diameter	10	12	15	18	20	22
1 Syst.	2.8	3.5	4.2	5.0	5.3	5.8
2 Syst.	2.4	3.0	3.6	4.3	4.6	5.0
3 Syst.	2.0	2.5	3.0	3.5	3.8	4.1
4 Syst.	1.6	2.0	2.4	2.8	3.0	3.3
5 Syst.	1.2	1.5	1.8	2.1	2.3	2.5

Red discharge						
Diameter	10	12	15	18	20	22
1 Syst.	1.5	1.8	2.2	2.7	2.9	3.0
2 Syst.	1.2	1.5	1.8	2.2	2.4	2.5
3 Syst.	0.9	1.1	1.4	1.7	1.8	2.0
4 Syst.	0.7	0.8	1.0	1.2	1.3	1.4
5 Syst.	0.4	0.5	0.6	0.8	0.8	0.9

The values given represent the maximum connectable tube lengths which must not be exceeded. Shorter tube lengths, however, may be connected without any restrictions. The tube lengths are calculated on the basis of the 'Filling Pressure Recommendations for Fluorescent Tubes' published by the German *Fachverband Lichtwerbung*.

Housing dimensions




160x29x25 mm
Housing colour: white
All dimensions in millimetres

Order no. 1 2020 266 [EVG 20/2 SL]
Order no. 1 2020 276 [EVG 20/2 SLR]

Mains cable: H03VV-F, 3x0.75

High voltage cable: PVC 4.0 mm (diameter)

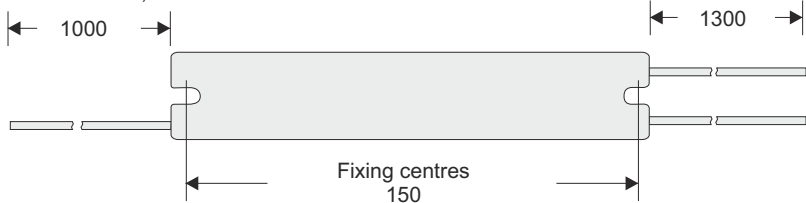

1000 1300

Fixing centres 150

Technical modifications reserved. Nov. 2012 Content is protected by copyright. Source: www.hansen-led.com D12020266/11/2012