

EVG 40/1 D

(dimmable electronic ballast)

hansen

<u>Type</u>	Electronic transformer for neon tubes according to VDE 0712. Dimmable via reverse phase control at the input side. Suitable for indoor and outdoor systems. Limited suitability for flash operation.	CE
<u>Weight</u>	0.750 kg	
<u>Radio interference suppression</u>	According to VDE 0875, Part 2A1 (EN 55015)	
<u>Temperatures</u>	Ambient temperature range: -25 to +65°C Temperature limit: +80°C (max. ambient temp. that the EVG is able to withstand for a short period of time without being destroyed)	
<u>Housing</u>	Hard PVC shell Fire protection class B1 Standard colour: white Sealing compound: polyurethane (black)	
<u>Class of protection</u>	I	
<u>Degree of protection</u>	IP 67	

Primary Data

<u>Mains voltage</u>	230 V, +/- 10 %, 50 / 60 Hz
<u>Current consumption</u>	Depends on the connected tube load; max. 0.50 A cos phi 0.95
<u>Dimming</u>	reverse phase control at the input line

Protective Equipment

<u>Safety fuse</u>	Integrated 1 A melting fuse offering protection against internal short circuits
--------------------	---

Caution:
The installation instructions must be observed when using the transformer!

Secondary Data

990 V with 40 mA constant current, symmetrical alternating current, load-dependent operating frequency, 16 - 20 kHz, earthed secondary winding.

Additional the output current is dimmable via reverse phase control at the input line.

Secondary current tolerance: (without dimming) -5/+10 % (of rated value)

Suitable for blue discharge tubes.
Only partly suitable for red discharge tubes due to an occasional jelly bean effect.


Connectable tube lengths (in metres):

Blue discharge (outdoor)						
Diameter.	10	12	15	18	20	22
1 Syst.			1.4	1.7	1.8	2.0
2 Syst.			0.8	0.9	1.0	1.1

Blue discharge (indoor)						
Diameter	10	12	15	18	20	22
1 Syst.			1.8	2.1	2.3	2.5
2 Syst.			1.2	1.4	1.5	1.6

The values given represent the maximum connectable tube lengths which must not be exceeded. Shorter tube lengths, however, may be connected without any restrictions. The tube lengths are calculated on the basis of the 'Filling Pressure Recommendations for Fluorescent Tubes' published by the German *Fachverband Lichtwerbung*.

Housing dimensions

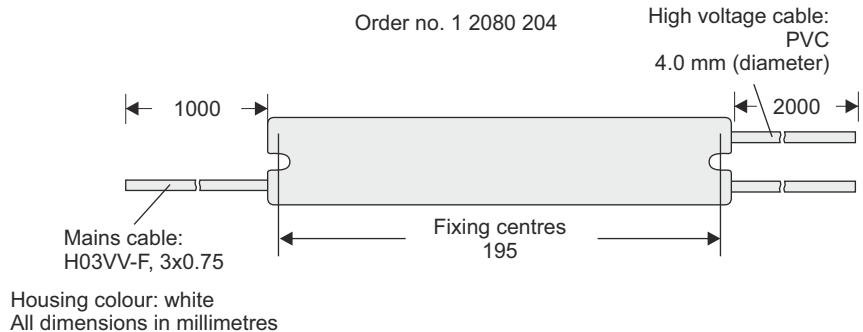

Technical modifications reserved. June 2013 Content is protected by copyright. Source: www.hansen-led.com D14010202/06/2013