

EVG 80/1 D DUO

(dimmable electronic ballast)

hansen

Type Electronic transformer for neon tubes according to VDE 0712. Dimmable via reverse phase control at the input side.

Suitable for indoor and outdoor systems. Limited suitability for flash operation.

Weight 0.970 kg



Radio interference suppression According to VDE 0875, Part 2A1 (EN 55015)

Temperatures Ambient temperature range: -25 to +65°C
Temperature limit: +80°C
(max. ambient temp. that the EVG is able to withstand for a short period of time without being destroyed)

Housing Hard PVC shell
Fire protection class B1
Standard colour: white
Sealing compound: polyurethane (black)

Class of protection I

Degree of protection IP 67

Secondary Data

2 electric circuits, 990 V each with 80 mA constant current, symmetrical alternating current, operating frequency approx. 25 kHz.

Additional the output current is dimmable via reverse phase control at the input line.

Secondary current tolerance: (without dimming) -5/+10 % (of rated value)

Suitable for blue discharge tubes. Only partly suitable for red discharge tubes due to an occasional jelly bean effect.

Connectable tube lengths (in metres): (per circuit)

Blue discharge (outdoor)						
Diameter.	10	12	15	18	20	22
1 Syst.			1.4	1.7	1.8	2.0
2 Syst.			0.8	0.9	1.0	1.1

Blue discharge (indoor)						
Diameter	10	12	15	18	20	22
1 Syst.			1.8	2.1	2.3	2.5
2 Syst.			1.2	1.4	1.5	1.6

Red discharge						
Diameter	10	12	15	18	20	22
1 Syst.			0.9	1.1	1.2	1.2
2 Syst.			0.5	0.6	0.6	0.7

The values given represent the maximum connectable tube lengths which must not be exceeded. Shorter tube lengths, however, may be connected without any restrictions. The tube lengths are calculated on the basis of the 'Filling Pressure Recommendations for Fluorescent Tubes' published by the German *Fachverband Lichtwerbung*.

Primary Data

Mains voltage 230 V, +/- 10 %, 50 / 60 Hz

Current consumption Depends on the connected tube load; max. 0.80 A
cos phi 0.95

Dimming reverse phase control at the input line

Protective Equipment


Safety fuse Integrated 1 A melting fuse offering protection against internal short circuits

Caution:
The installation instructions must be observed when using the transformer!

Housing dimensions



205x56x38 mm

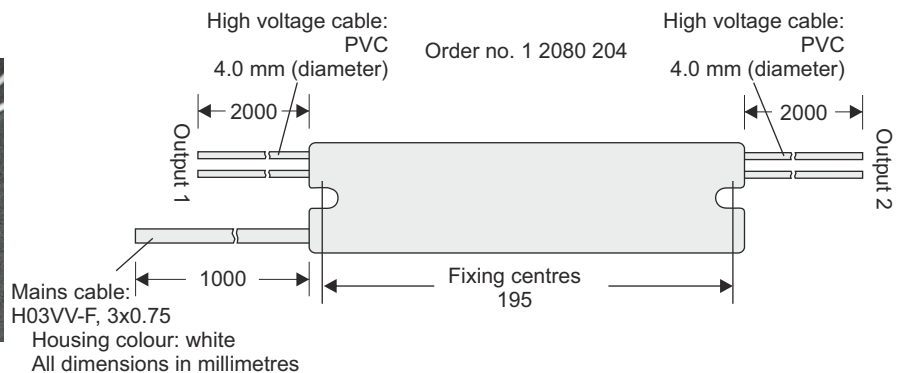

Technical modifications reserved. June 2013 Content is protected by copyright. Source: www.hansen-led.com D18010215/06/2013